TenarisHydril Wedge Thread Drill Pipe

2.875” x 10.40 lb/ft WT 23 Range 2

TenarisHydril Wedge Thread Drill Pipe

2.875” x 10.40 lb/ft WT 23 Range 2

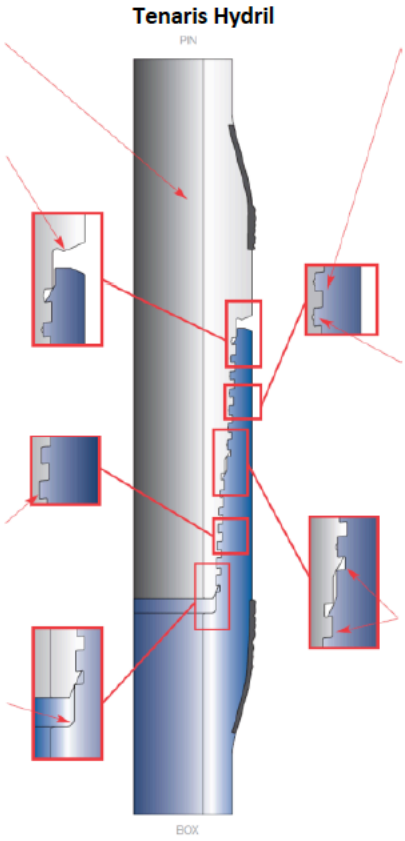

Wedge Thread Drill Pipe
WT23

Specification	
OEM	TenarisHydril
Country of Origin	USA
Nominal OD	2 7/8” (2.875”) / Premium 2.209”
Nominal ID	2.151” / Premium 2.151”
Steel Grade	S-135
Nominal Weight	10.40#
Nominal Wall Thickness	0.362”
Drift Size	1.375”
Hardbanding	None
IPC	TK34P
Pin Length	12”
Box Length	9”
Average Weight Per Joint	320 lbs (148 kgs)
Manufacturing Criteria	API Spec 5DP
Pipe Body Capacities	
Yield Strength	385,820 lbs / Premium 299,764 lbs
API Collapse	29,716 psi / Premium 25,602 psi
Torsional Yield	20,798 lb/ft / Premium 15,945 lb/ft
Pipe Burst Resistance	29,747 psi / Premium 27,197 psi

Tool Joint / Connection Specifications			
Connection	WT 23	Compatible With	
OD	3 1/8” (3.125”)	ID	1 1/2” (1.500”)
Adjusted Weight	10.50 lb/ft	Average Length	30.5 ft
Tensile Yield	387,000 lbs	Torsional Yield	10,400 ft/lbs
Minimum Make Up Torque	2,200 lb/ft	Maximum Make Up Torque	8,300 lb/ft
Fluid Displacement	0.16 gal/ft	Fluid Capacity	0.18 gal/ft
Type of Upset	IU	Inspection Criteria	NS-2

The information on this specification sheet is provided for illustration purposes only and is taken from information available from the manufacturer and other public sources. Saltire Energy Limited accepts no responsibility or liability for the accuracy of the information provided or for any error, omission or misstatement.

Our Locations

SALTIRE ENERGY HUB

Badentoy Cresent, Portlethen

Aberdeen, AB12 4YD

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

FAR EAST

No.20 Tuas Ave 10, Singapore, 639144

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

MIDDLE EAST

Musaffah, Abu Dhabi, 53161

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

NORWAY

Hamrasletta 5, 4056 Tanager, Stavanger

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

Saltire energy

www.saltire-energy.com