VAM Drilling Heavyweight Drill Pipe

3.500” X Welded HWDP NC38 DSTJ Range 2

VAM Drilling Heavyweight Drill Pipe

3.500” X Welded HWDP NC38 DSTJ Range 2

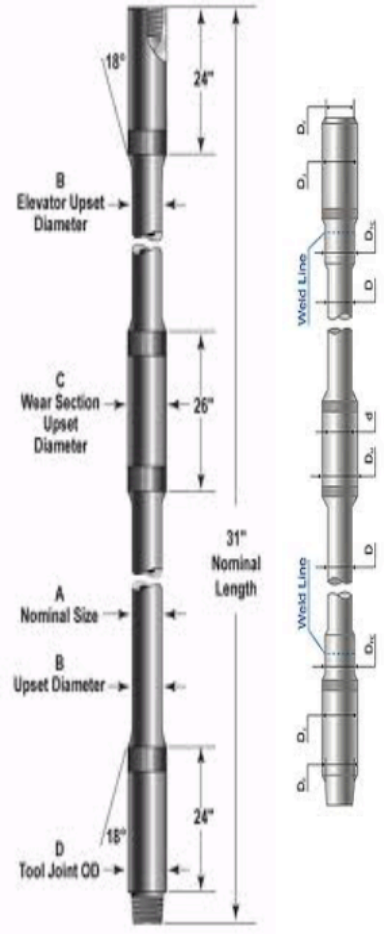

Specification	
OEM	VAM Drilling
Country of Origin	France
Nominal OD	3 1/2” (3.500”)
Nominal ID	2 9/16”
Steel Grade	AISI 4140 120ksi
Nominal Weight	19.00#
Nominal Wall Thickness	15/32” (0.4688”)
Drift Size	2 5/16” (2.313”)
Hardbanding	Arnco 300XT
Hardbanding Center Wear Band	PRO-CASTING
Pin Length	24”
Box Length	24”
Average Weight Per Joint	594 lbs (270 kgs)
Manufacturing Criteria	API Spec 7-1 /NS-1
Pipe Body Capacities	
Yield Strength	536,000 lbs
API Collapse	27,800 psi
Torsional Yield Strength	34,600 lb/ft
Pipe Burst Resistance	32,100 psi

Tool Joint / Connection Specifications			
Connection	NC38 DSTJ	**Compatible With**	NC38 GPDS 38
OD	5” (5.000”)	**ID**	2 9/16” (2.5625”)
Type of Tool Joint	Welded	**AISI 414H Mod**	120 ksi
Adjusted Weight	19.16 lb/ft	**Average Length**	31.0 ft
Tensile Yield	649,000 lbs	**Torsional Yield**	23,600 ft/lbs
Min Make Up Torque	17,325 lb/ft	**Max Make Up Torque**	15,675 lb/ft
Center Upset OD	4” (4.000)	**Fluid Capacity**	
Type of Upset		**Inspection Criteria**	NS-2

The information on this specification sheet is provided for illustration purposes only and is taken from information available from the manufacturer and other public sources. Saltire Energy Limited accepts no responsibility or liability for the accuracy of the information provided or for any error, omission or misstatement.

Our Locations

SALTIRE ENERGY HUB

Badentoy Cresent, Portlethen

Aberdeen, AB12 4YD

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

FAR EAST

No.20 Tuas Ave 10, Singapore, 639144

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

MIDDLE EAST

Musaffah, Abu Dhabi, 53161

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

NORWAY

Hamrasletta 5, 4056 Tanager, Stavanger

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

Saltire energy

www.saltire-energy.com