NOV Grant Prideco Heavyweight Drill Pipe

4.000” X Welded Tri-Spiral HWDP TT390 Range 2

NOV Grant Prideco Heavyweight Drill Pipe

4.000” X Welded Tri-Spiral HWDP TT390 Range 2

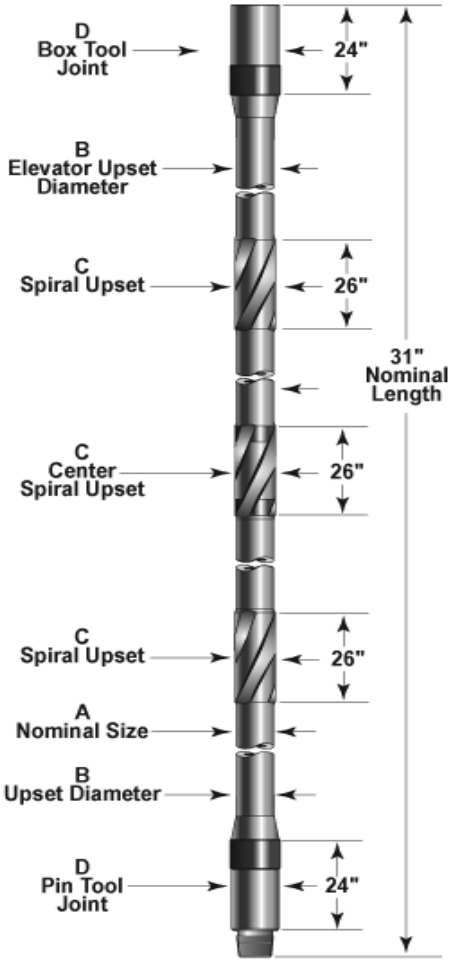

Specification	
OEM	NOV Grant Prideco
Country of Origin	USA
Nominal OD	4 ” (4.000”)
Nominal ID	2 9/16”
Steel Grade	HW-105
Nominal Weight	
Nominal Wall Thickness	23/32” (0.720”)
Drift Size	2 5/16” (2.312”)
Hardbanding	TCS-Ti
Hardbanding Center Wear Band	Smooth-X
Pin Length	24”
Box Length	24”
Average Weight Per Joint	977 lbs (444 kgs)
Manufacturing Criteria	API Spec 7-1 /NS-1
Pipe Body Capacities	
Yield Strength	778,200 lbs
API Collapse	30,962 psi
Torsional Yield Strength	52,800 lb/ft
Pipe Burst Resistance	33,029 psi

Tool Joint / Connection Specifications			
Connection	Turbo Torque 390	**Compatible With**	
OD	5” (5.000”)	**ID**	2 9/16” (2.5625”)
Type of Tool Joint	Integral	**Non-Welded**	
Adjusted Weight	31.51 lb/ft	**Average Length**	31.0 ft
Tensile Yield	754,200 lbs	**Torsional Yield**	47,200 ft/lbs
Recommended Make Up Torque	33,000 lb/ft	**Minimum Make Up Torque**	23,600 lb/ft
Fluid Displacement	0.47 gal/ft	**Fluid Capacity**	0.27 gal/ft
Type of Upset		**Inspection Criteria**	NS-2

The information on this specification sheet is provided for illustration purposes only and is taken from information available from the manufacturer and other public sources. Saltire Energy Limited accepts no responsibility or liability for the accuracy of the information provided or for any error, omission or misstatement.

Our Locations

SALTIRE ENERGY HUB

Badentoy Cresent, Portlethen

Aberdeen, AB12 4YD

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

FAR EAST

No.20 Tuas Ave 10, Singapore, 639144

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

MIDDLE EAST

Musaffah, Abu Dhabi, 53161

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

NORWAY

Hamrasletta 5, 4056 Tanager, Stavanger

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

Saltire energy

www.saltire-energy.com