Interdril Heavyweight Drill Pipe

5.000” X Integrated HWDP NC50 Range 2

Interdril Heavyweight Drill Pipe

5.000” X Integrated HWDP NC50 Range 2

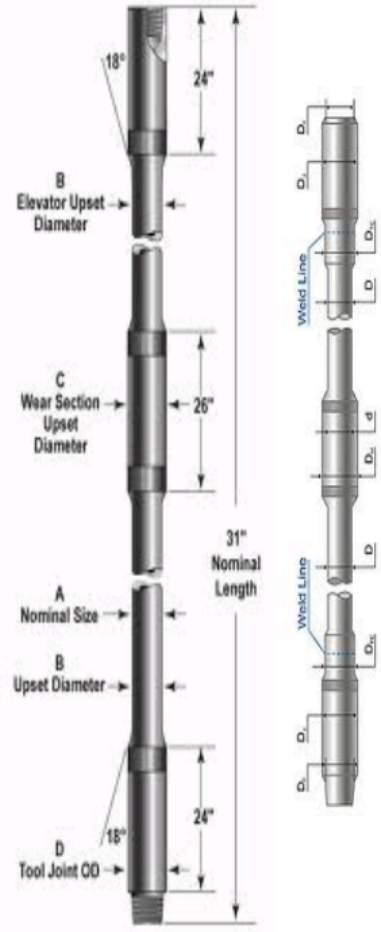

Specification	
OEM	Interdril (Asia)
Country of Origin	India
Nominal OD	5” (5.000”)
Nominal ID	3 1/4” (3.250”)
Steel Grade	AISI 4145 H Modified
Nominal Weight	49.00#
Nominal Wall Thickness	
Drift Size	3 1/8” (3.125”)
Hardbanding	Arnco 300XT
Hardbanding Center Wear Band	Arnco 300XT
Pin Length	24”
Box Length	24”
Average Weight Per Joint	1523 lbs (692 kgs)
Manufacturing Criteria	API Spec 7-1 /NS-1
Pipe Body Capacities	
Yield Strength	1,247,313 lbs
API Collapse	16,110 psi
Torsional Yield Strength	106,630 lb/ft
Pipe Burst Resistance	38,500 psi

Tool Joint / Connection Specifications			
Connection	NC50	**Compatible With**	NC50 DSTJ GPDS 50
OD	6 5/8” (6.625”)	**ID**	3 1/4” (3.0.63”)
Type of Tool Joint	Integral	**Non-welded**	
Adjusted Weight		**Average Length**	31.0 ft
Tensile Yield	1,268,960 lbs	**Torsional Yield**	65,600 ft/lbs
Make Up Torque	30,700 lb/ft		
Center Upset OD	5 1/2” (5.500)	**Fluid Capacity**	
Type of Upset		**Inspection Criteria**	NS-2

The information on this specification sheet is provided for illustration purposes only and is taken from information available from the manufacturer and other public sources. Saltire Energy Limited accepts no responsibility or liability for the accuracy of the information provided or for any error, omission or misstatement.

Our Locations

SALTIRE ENERGY HUB

Badentoy Cresent, Portlethen

Aberdeen, AB12 4YD

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

FAR EAST

No.20 Tuas Ave 10, Singapore, 639144

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

MIDDLE EAST

Musaffah, Abu Dhabi, 53161

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

NORWAY

Hamrasletta 5, 4056 Tanager, Stavanger

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

Saltire energy

www.saltire-energy.com