


JSH Drilling Tools Heavyweight Drill Pipe

3.500" X Integrated HWDP NC38 Range 2



JSH Drilling Tools Heavyweight Drill Pipe

3.500" X Integrated HWDP NC38 Range 2

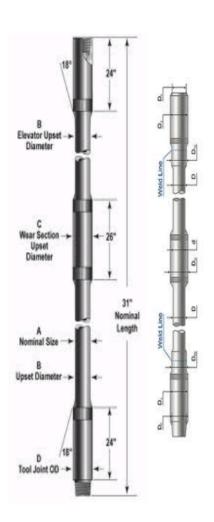

Specification			
OEM	JSH Drilling Tools		
Country of Origin	China		
Nominal OD	3 1/2" (3.500")		
Nominal ID	2 1/4" (2.250")		
Steel Grade	AISI 4145 H Modified		
Nominal Weight	20#		
Nominal Wall Thickness	5/8" (0.625")		
Drift Size	2 1/16" (2.063")		
Hardbanding	Arnco 300XT		
Hardbanding Center Wear Band	Arnco 100XT		
Pin Length	24"		
Box Length	24"		
Average Weight Per Joint	783 lbs (356 kgs)		
Manufacturing Criteria	API Spec 7-1 /NS-1		
Pipe Body Capacities			
Yield Strength	677,406 lbs		
API Collapse	35,204 psi		
Torsional Yield Strength	40,279 lb/ft		
Pipe Burst Resistance	43,592 psi		

Tool Joint / Connection Specifications			
Connection	NC38	Compatible With	NC38 DSTJ GPDS 38
OD	5" (5.000")	ID	2 1/4" (2.250")
Type of Tool Joint	Integral	Non-welded	
Adjusted Weight	25.25 lb/ft	Average Length	31.0 ft
Tensile Yield	655,814 lbs	Torsional Yield	20,999 ft/lbs
Recommended Make Up Torque	12,600 lb/ft	Minimum Make Up Torque Maximum Make Up Torque	10,500 lb/ft 14,700 lb/ft
Center Upset OD	4" (4.000)	Fluid Capacity	0.297 gal/ft
Type of Upset		Inspection Criteria	NS-2

The information on this specification sheet is provided for illustration purposes only and is taken from information available from the manufacturer and other public sources. Saltire Energy Limited accepts no responsibility or liability for the accuracy of the information provided or for any error, omission or misstatement.

Our Locations

SALTIRE ENERGY HUB

Badentoy Cresent, Portlethen
Aberdeen, AB12 4YD
enquiries@saltire-energy.com
+44 (0)1224 872228

+44 (0)1224 897541

FAR EAST

No.20 Tuas Ave 10, Singapore, 639144
enquiries@saltire-energy.com
+44 (0)1224 872228
+44 (0)1224 897541

MIDDLE EAST

Musaffah, Abu Dhabi, 53161 enquiries@saltire-energy.com +44 (0)1224 872228 +44 (0)1224 897541

NORWAY

Hamrasletta 5, 4056 Tanager, Stavanger enquiries@saltire-energy.com +44 (0)1224 872228 +44 (0)1224 897541

