




NOV Grant Prideco Heavyweight Drill Pipe

5.875" X Welded HWDP XT57 Range 2

NOV Grant Prideco Heavyweight Drill Pipe

5.875" X Welded HWDP XT57 Range 2

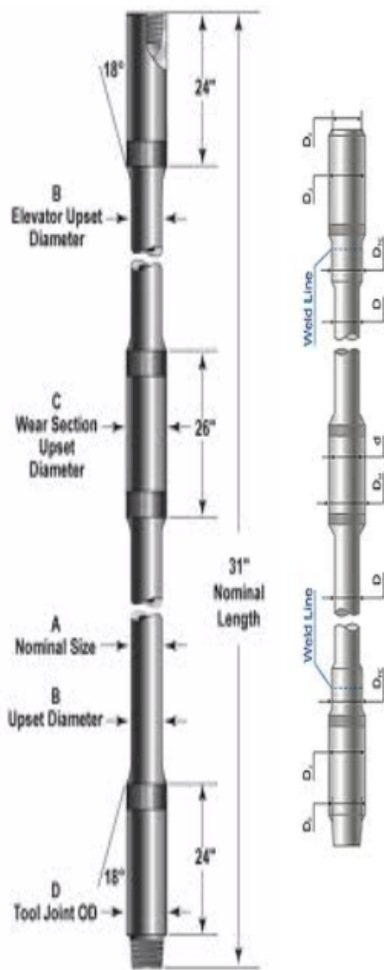

Specification	
OEM	NOV Grant Prideco
Country of Origin	USA
Nominal OD	5 7/8 (5.875")
Nominal ID	4" (4.000")
Steel Grade	HW-105
Nominal Weight	49#
Nominal Wall Thickness	0.938"
Drift Size	3 3/4" (3.750")
Hardbanding	Arncos 300XT
Hardbanding Center Wear Band	Smooth-X
Pin Length	24"
Box Length	24"
Average Weight Per Joint	1,709 lbs (777 kgs)
Manufacturing Criteria	API Spec 7-1 /NS-1
Pipe Body Capacities	
Yield Strength	1,526,900 lbs
API Collapse	28,163 psi
Torsional Yield Strength	157,800 lb/ft
Pipe Burst Resistance	29,322 psi

Tool Joint / Connection Specifications

Connection	XT57	Compatible With	
OD	7" (7.000")	ID	4" (4.000")
Type of Tool Joint	Welded		
Adjusted Weight	55.14 lb/ft	Average Length	31.0 ft
Tensile Yield	1,394,900 lbs	Torsional Yield	106.200 ft/lbs
Min Make Up Torque	36,400 lb/ft	Max Make Up Torque	63,700 lb/ft
Centre Upset OD	6 3/8" (6.375")	Fluid Capacity	0.65 gal/ft
Type of Upset		Inspection Criteria	NS-2

The information on this specification sheet is provided for illustration purposes only and is taken from information available from the manufacturer and other public sources. Saltire Energy Limited accepts no responsibility or liability for the accuracy of the information provided or for any error, omission or misstatement.

Our Locations

SALTIRE ENERGY HUB

Badentoy Crescent, Portlethen

Aberdeen, AB12 4YD

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

FAR EAST

No.20 Tuas Ave 10, Singapore, 639144

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

MIDDLE EAST

Musaffah, Abu Dhabi, 53161

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

NORWAY

Hamrasletta 5, 4056 Tanager, Stavanger

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541



www.saltire-energy.com