NOV Grant Prideco Heavyweight Drill Pipe

4.000” X Welded HWDP XT39 Range 2

NOV Grant Prideco Heavyweight Drill Pipe

4.000” X Welded HWDP XT39 Range 2

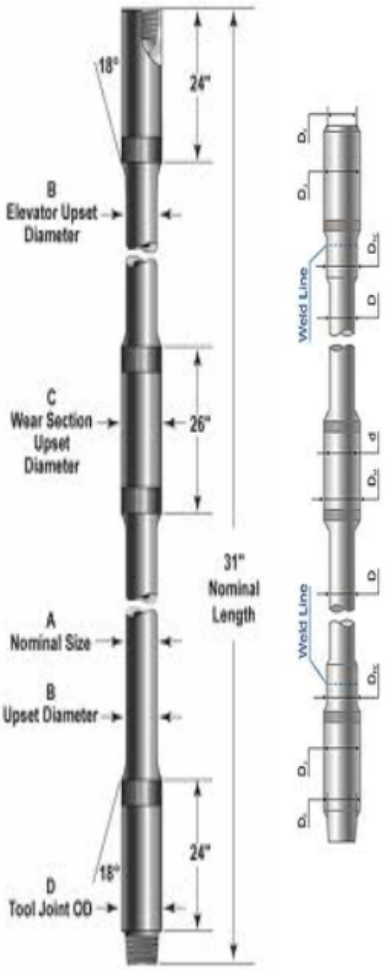

Specification	
OEM	NOV Grant Prideco
Country of Origin	USA
Nominal OD	4 ” (4.000”)
Nominal ID	2 9/16” (2.562”)
Steel Grade	HW-95 120 ksi min
Nominal Weight	25#
Nominal Wall Thickness	23/32” (0.720”)
Drift Size	2 5/16” (2.312”)
Hardbanding	Arnco 300XT
Hardbanding Center Wear Band	Smooth-X
Pin Length	24”
Box Length	24”
Average Weight Per Joint	875 lbs (398 kgs)
Manufacturing Criteria	API Spec 7-1 /NS-1
Pipe Body Capacities	
Yield Strength	704,100 lbs
API Collapse	28,014 psi
Torsional Yield Strength	47,700 lb/ft
Pipe Burst Resistance	29,883 psi

Tool Joint / Connection Specifications			
Connection	XT39	**Compatible With**	
OD	4 7/8” (4.875”)	**ID**	2 9/16” (2.5625”)
Type of Tool Joint	Welded		
Adjusted Weight	28.24 lb/ft	**Average Length**	31.0 ft
Tensile Yield	729,900 lbs	**Torsional Yield**	37,000 ft/lbs
Min Make Up Torque	12,400 lb/ft	**Max Make Up Torque**	22,200 lb/ft
Centre Upset OD	4 1/2” (4.500”)	**Fluid Capacity**	0.27 gal/ft
Type of Upset		**Inspection Criteria**	NS-2

The information on this specification sheet is provided for illustration purposes only and is taken from information available from the manufacturer and other public sources. Saltire Energy Limited accepts no responsibility or liability for the accuracy of the information provided or for any error, omission or misstatement.

Our Locations

SALTIRE ENERGY HUB

Badentoy Cresent, Portlethen

Aberdeen, AB12 4YD

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

FAR EAST

No.20 Tuas Ave 10, Singapore, 639144

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

MIDDLE EAST

Musaffah, Abu Dhabi, 53161

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

NORWAY

Hamrasletta 5, 4056 Tanager, Stavanger

enquiries@saltire-energy.com

+44 (0)1224 872228

+44 (0)1224 897541

Saltire energy

www.saltire-energy.com